

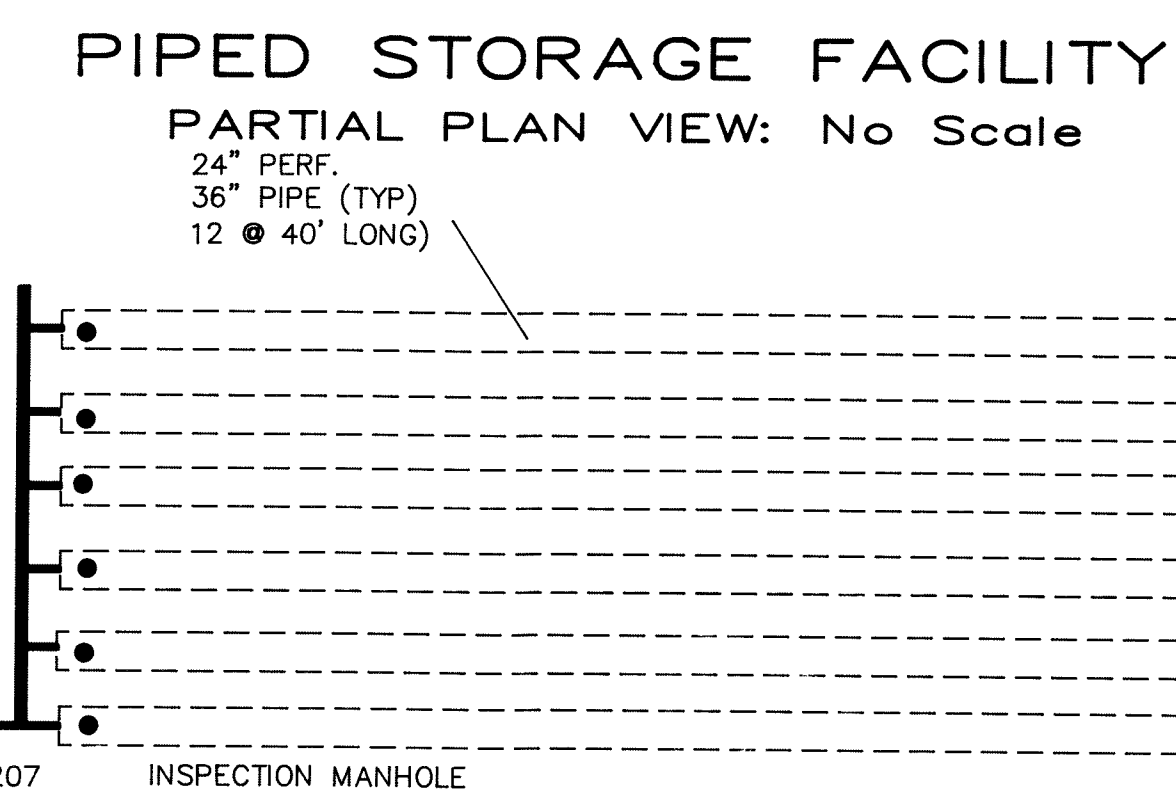
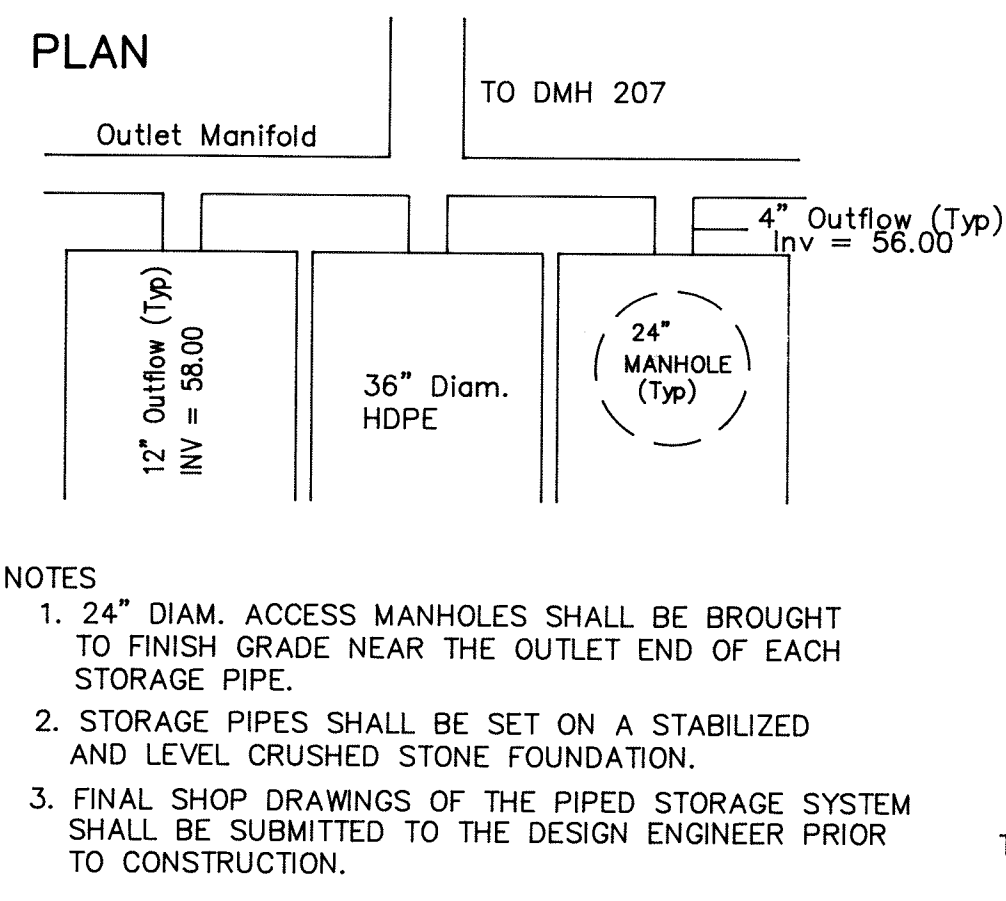
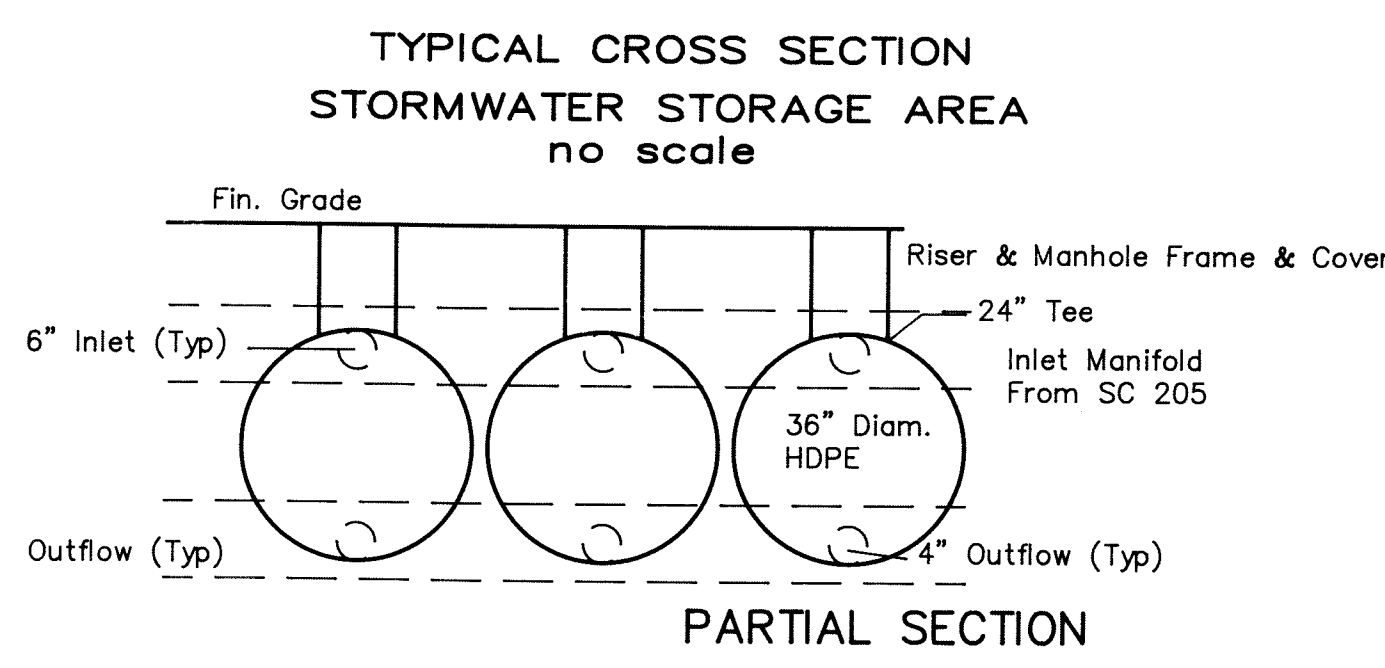
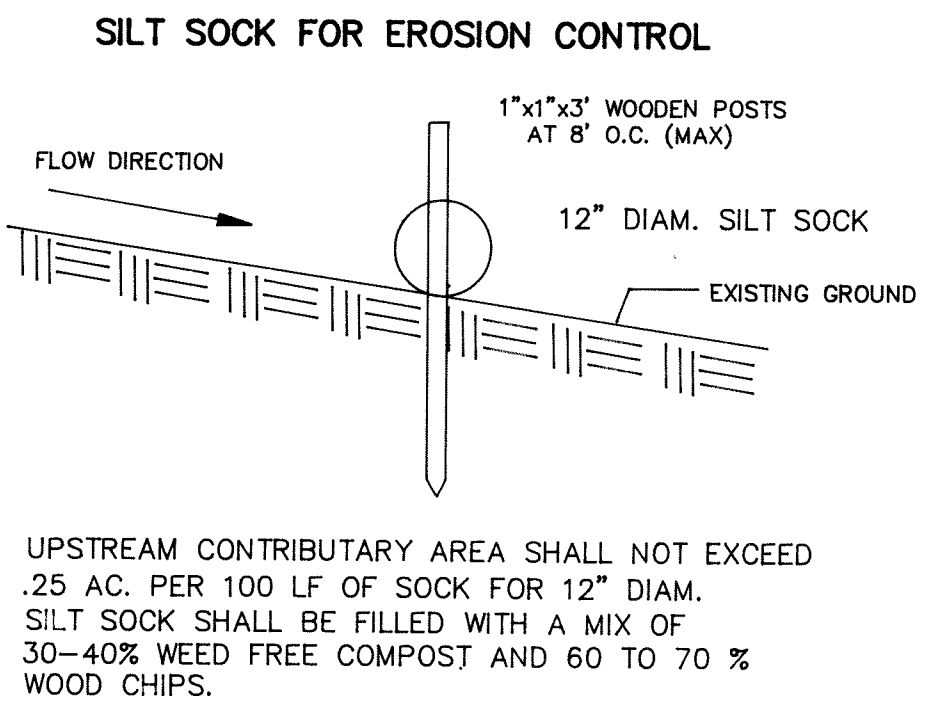
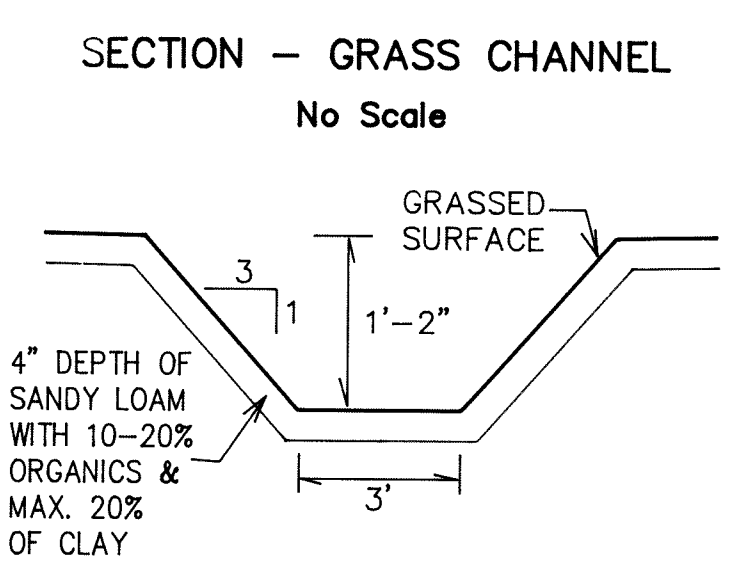
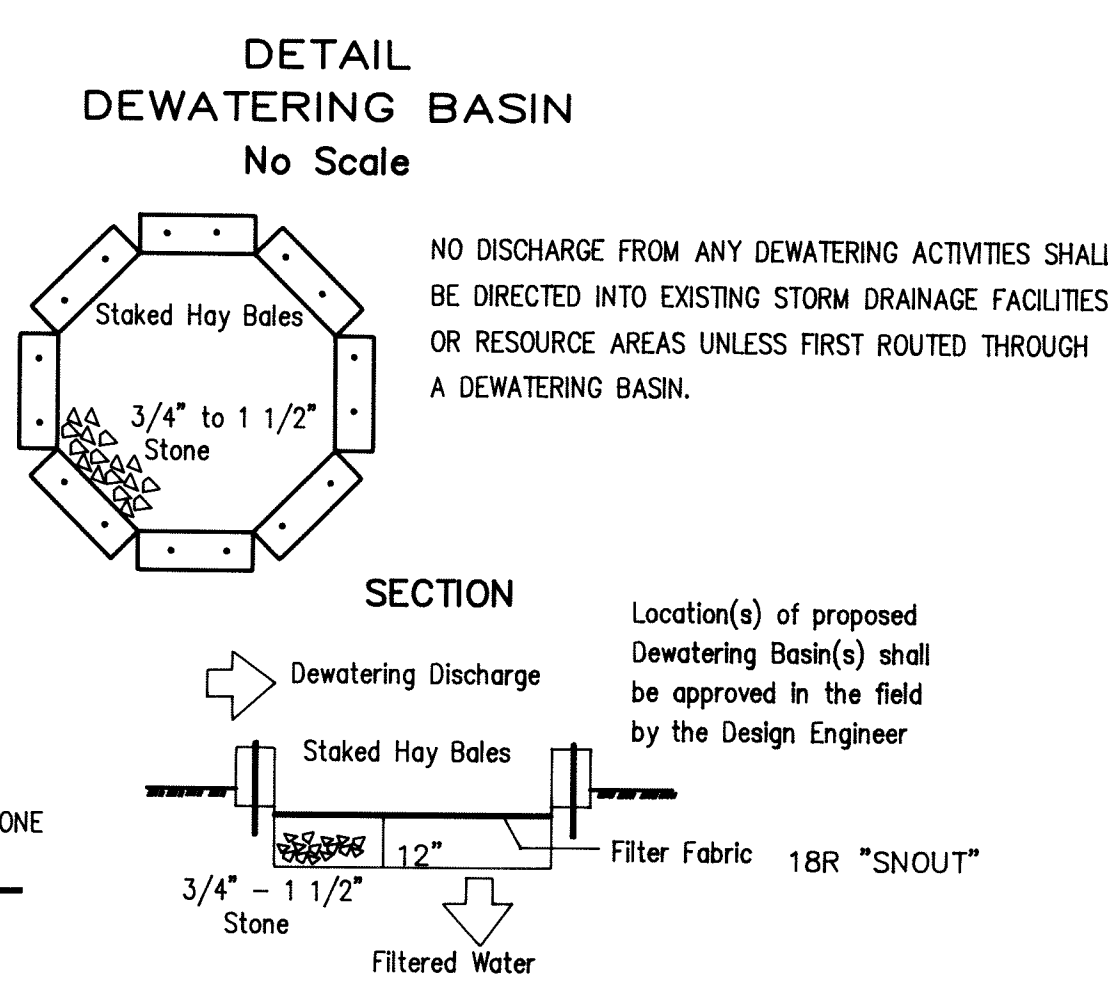
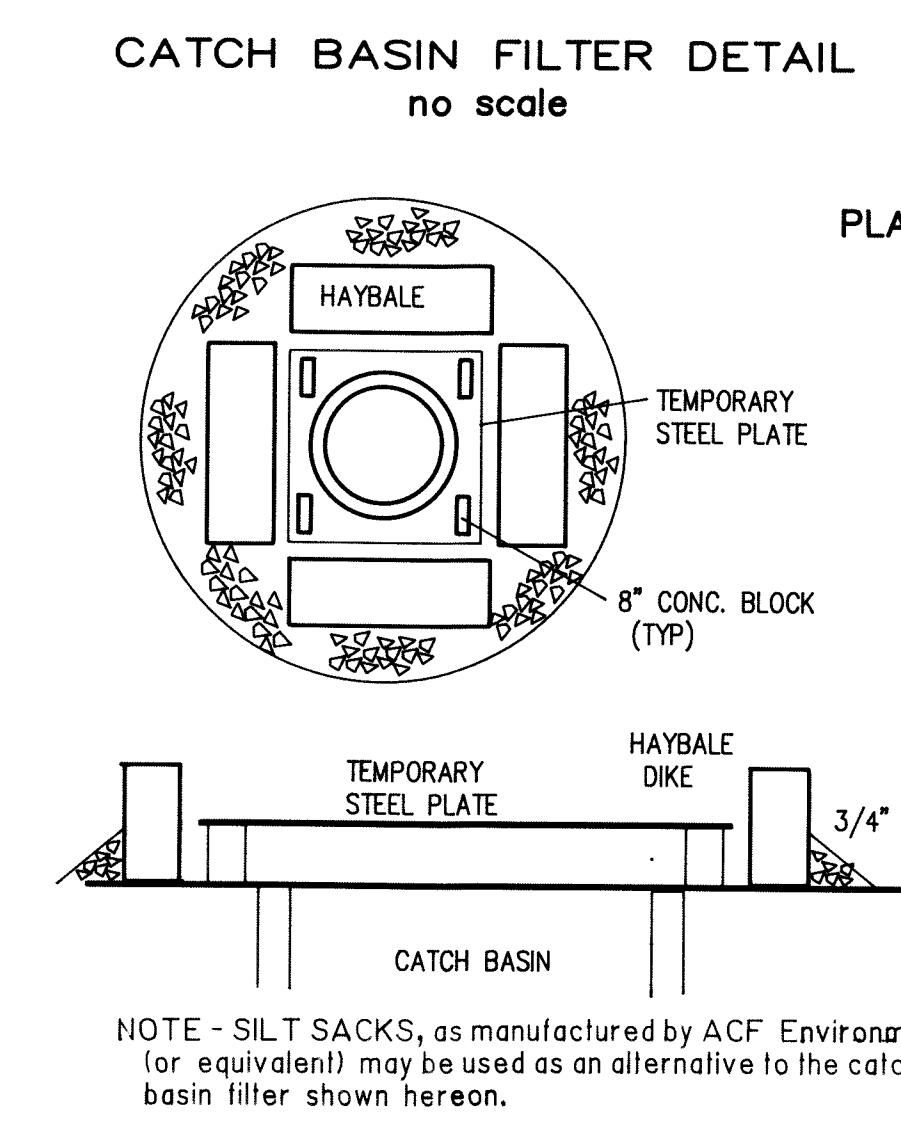
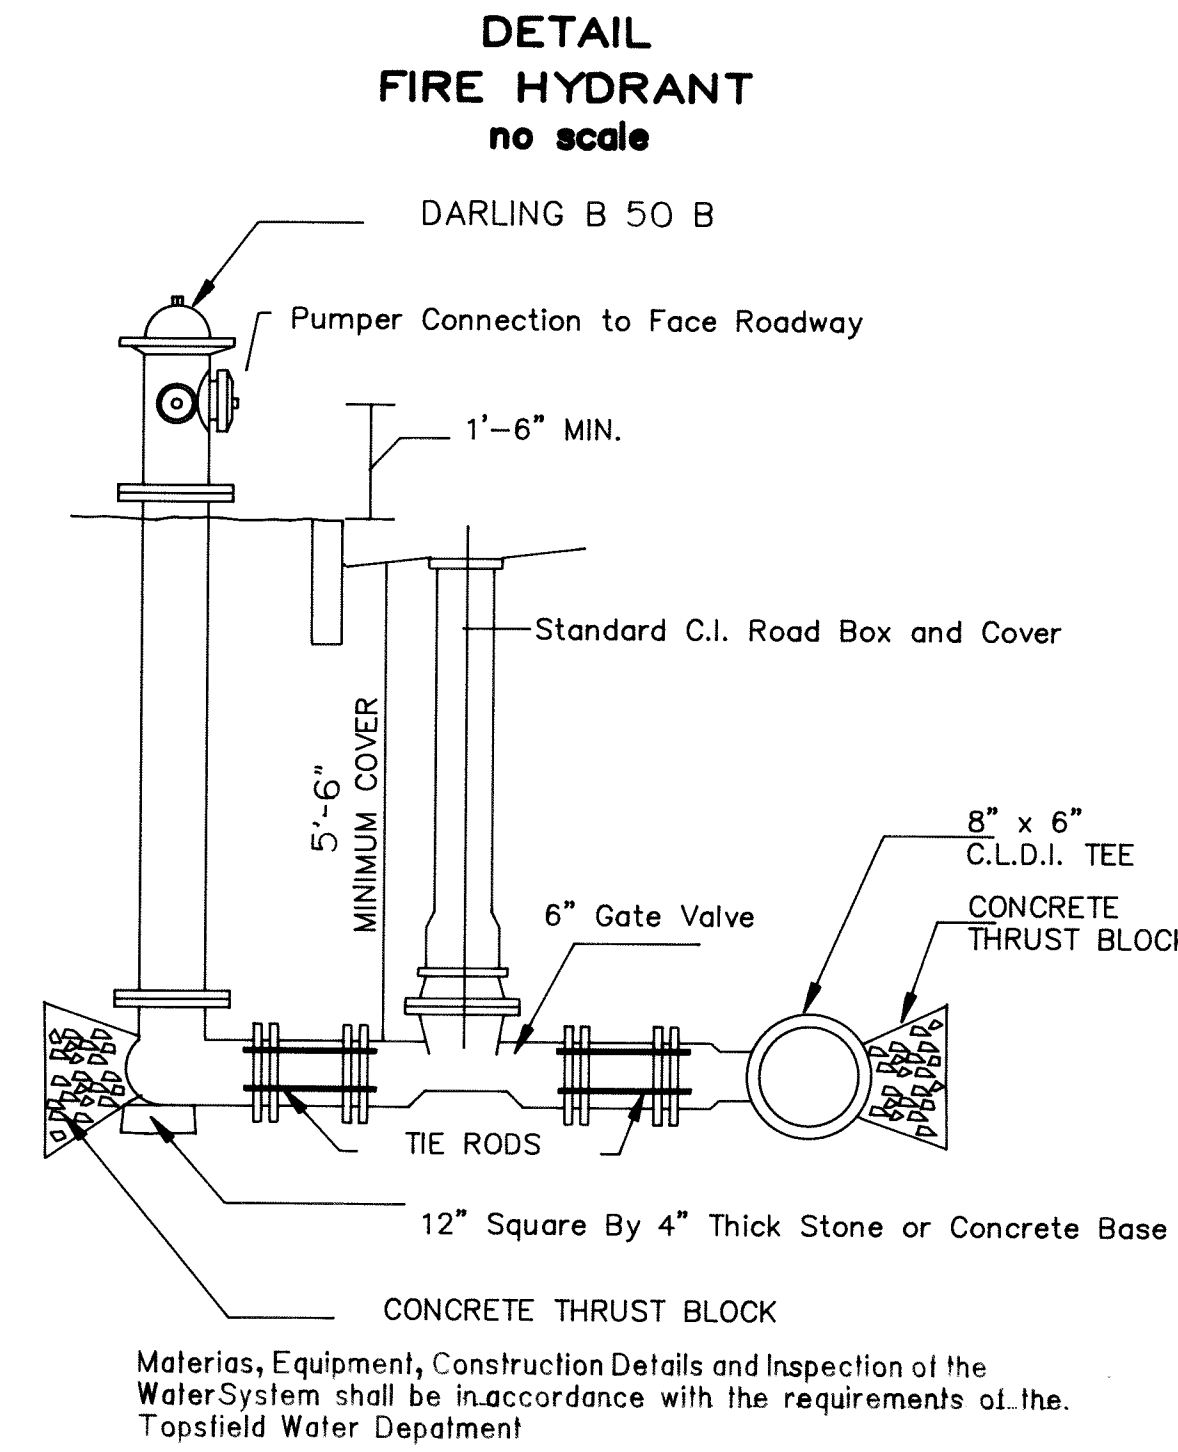
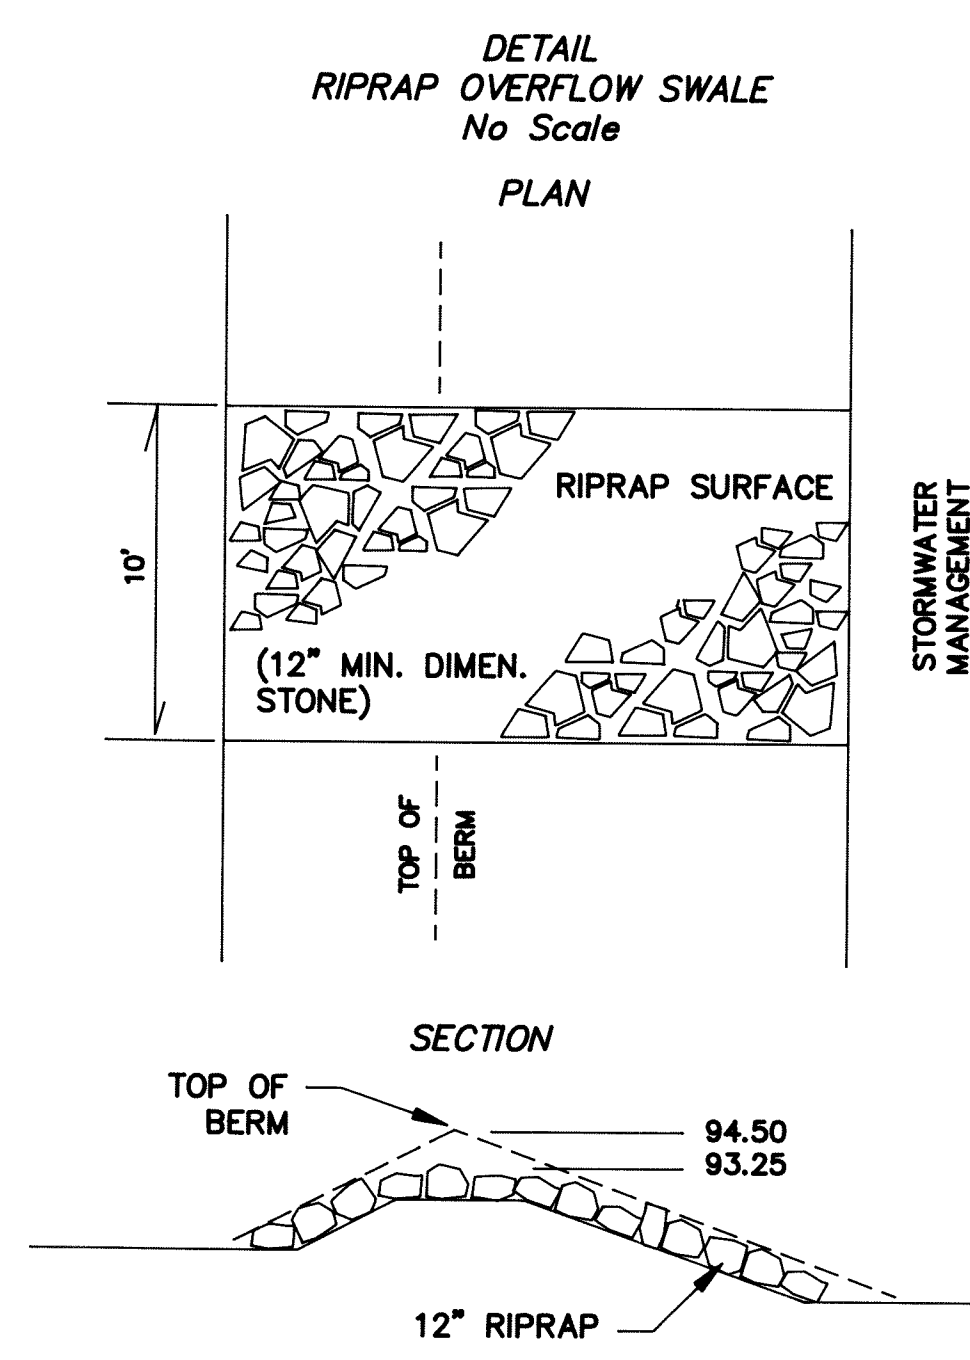


EROSION CONTROL PROGRAM

1. STAKED HAY BALES, SILT FENCE, TEMPORARY DIVERSION SWALES AND SEDIMENT BASINS SHALL BE INSTALLED IN ACCORDANCE WITH THIS PLAN OR AS OTHERWISE DIRECTED BY THE PROJECT ENGINEER OR THE CONSERVATION COMMISSION PRIOR TO COMMENCEMENT OF CONSTRUCTION ACTIVITIES. 20 ADDITIONAL HAY BALES AND 100 FT. OF SILT FENCE SHALL BE KEPT ON SITE FOR REPAIRS OR OTHER EROSION CONTROL NEEDS. THE CONTRACTOR SHALL INSPECT EROSION CONTROL FACILITIES WEEKLY AND AFTER EVERY RAINFALL EVENT TO CONFIRM THAT SAME ARE PROPERLY FUNCTIONING. ANY DEFICIENCIES IN THE EROSION CONTROL FACILITIES SHALL BE CORRECTED IMMEDIATELY.
2. ALL SOIL STOCKPILES SHALL BE PROTECTED AGAINST EROSION.
3. CATCH BASINS SHALL BE PROTECTED WITH FILTERS, AS SHOWN HEREON UNTIL NO SEDIMENT TRANSPORT IS VISIBLE DURING RAINFALL EVENTS. FILTERS SHALL BE INSPECTED WEEKLY AND MAINTAINED AS NECESSARY.
4. TEMPORARY EROSION CONTROL MEASURES TO BE TAKEN DURING CONSTRUCTION SHALL CONFORM WITH THE "MASSACHUSETTS EROSION AND SEDIMENT CONTROL GUIDELINES, URBAN AND SUBURBAN AREAS" DATED MARCH, 1997, AND MAY INCLUDE SOME OR ALL OF THE FOLLOWING MEASURES: TEMPORARY SEEDING, TEMPORARY MULCHING (STRAW), PERMANENT SEEDING, HYDROSEEDING, SODDING, AND PLACEMENT OF HAY OR JUTE NETTING DURING WINTER MONTHS.
5. DEBRIS AND/OR LITTER SHALL BE REMOVED FROM THE SITE ON A WEEKLY BASIS.
6. IF DUST IS GENERATED DURING CONSTRUCTION, IT SHALL BE CONTROLLED BY USE OF WATER TRUCKS, SPRINKLING OR TEMPORARY STABILIZATION METHODS.
7. AT THE COMPLETION OF THE PROJECT, ALL DISTURBED AREAS SHALL BE PERMANENTLY STABILIZED WITH LOAM AND SEED OR OTHER GROUND COVER.

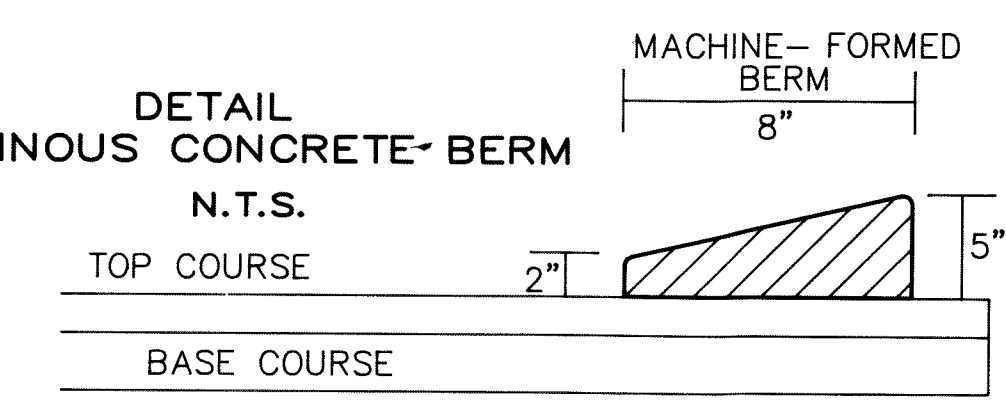

- NOTES
1. 24" DIAM. ACCESS MANHOLES SHALL BE BROUGHT TO FINISH GRADE NEAR THE OUTLET END OF EACH STORAGE PIPE.
 2. STORAGE PIPES SHALL BE SET ON A STABILIZED AND LEVEL CRUSHED STONE FOUNDATION.
 3. FINAL SHOP DRAWINGS OF THE PIPED STORAGE SYSTEM SHALL BE SUBMITTED TO THE DESIGN ENGINEER PRIOR TO CONSTRUCTION.

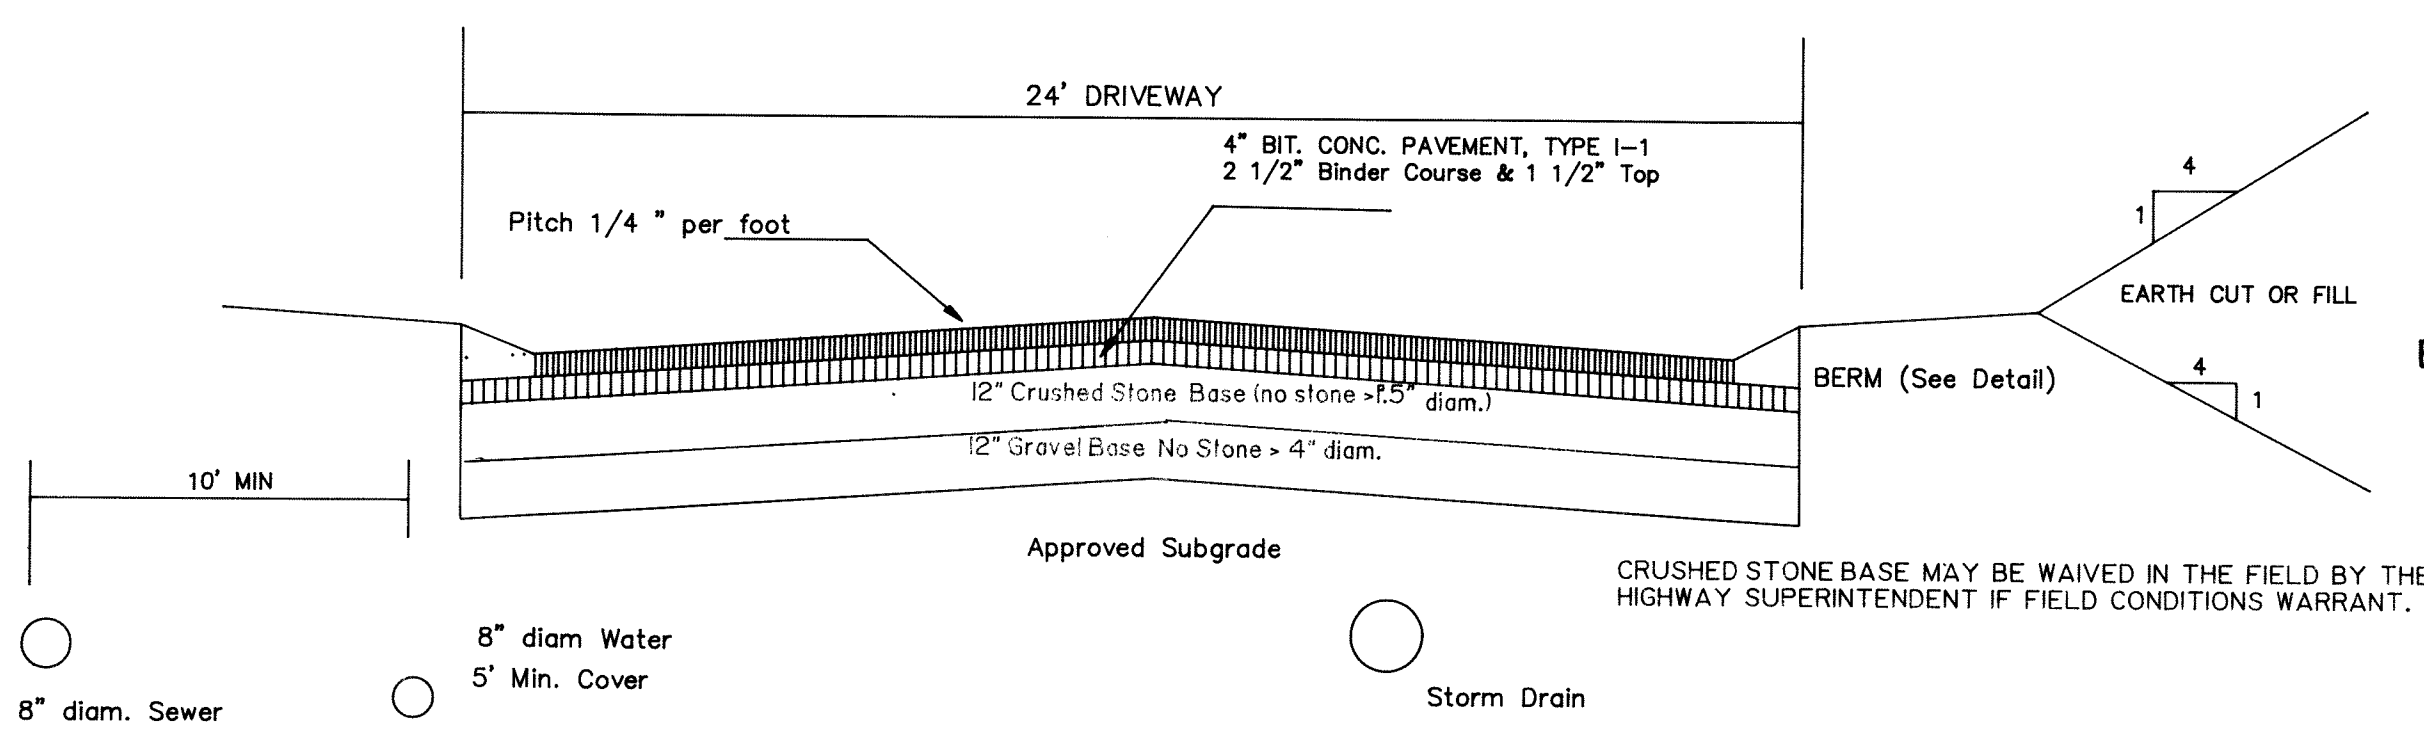

I HEREBY CERTIFY THAT THIS PLAN CONFORMS TO THE RULES AND REGULATIONS OF THE REGISTERS OF DEEDS OF THE COMMONWEALTH OF MASSACHUSETTS

FOR REGISTRY USE ONLY

DATE: September 2, 2008
REVISIONS
1. MARCH 31, 2009
2. JUNE 1, 2009
3. JULY 9, 2009
4. SEPTEMBER 16, 2009

SCALE AS NOTED

Prepared By:
Eastern Land Survey Assoc., Inc.
Christopher R. Mello P.L.S.
104 Lovell St., Boston, MA 01960
(978) 531-8121

Prepared For:
New Meadows Enterprises LLC
30 Wildes Road
Topsfield, MA 01963

SITE DEVELOPMENT PERMIT PLAN
THE MEADOWS
TOPSFIELD, MASSACHUSETTS
SITE DETAILS

F 14730

SHEET NO.
14 OF 14