


EROSION CONTROL NOTE:


AT A MINIMUM, ALL EROSION CONTROL MEASURES SHALL BE INSPECTED IN ACCORDANCE WITH THE ENVIRONMENTAL PROTECTION AGENCY'S 2012 CONSTRUCTION GENERAL PERMIT. SPECIFICALLY, SITE INSPECTIONS SHALL BE PERFORMED ONCE EVERY 7 DAYS OR ONCE EVERY 14 DAYS AND WITHIN 24 HOURS OF A STORM EVENT OF 0.25 INCHES OR GREATER, AT A MINIMUM.

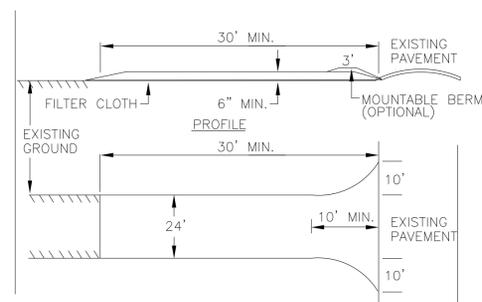

PLAN VIEW

1. STONE FOR A STABILIZED CONSTRUCTION ENTRANCE SHALL BE 2 TO 4 INCH STONE, RECLAIMED STONE, OR RECYCLED CONCRETE EQUIVALENT.
2. THE LENGTH OF THE STABILIZED ENTRANCE SHALL NOT BE LESS THAN 50 FEET, EXCEPT FOR A SINGLE RESIDENTIAL LOT WHERE A 30 FOOT MINIMUM LENGTH WOULD APPLY.
3. THE THICKNESS OF THE STONE FOR THE STABILIZED ENTRANCE SHALL NOT BE LESS THAN 6 INCHES.
4. THE WIDTH OF THE ENTRANCE SHALL NOT BE LESS THAN THE FULL WIDTH OF THE ENTRANCE WHERE INGRESS OR EGRESS OCCURS OR 10 FEET, WHICH EVER IS GREATER.
5. GEOTEXTILE FILTER CLOTH SHALL BE PLACED OVER THE ENTIRE AREA PRIOR TO PLACING THE STONE. FILTER CLOTH IS NOT REQUIRED FOR A SINGLE FAMILY RESIDENCE LOT.
6. ALL SURFACE WATER THAT IS FLOWING TO OR DIVERTED TOWARD THE CONSTRUCTION ENTRANCE SHALL BE PIPED BENEATH THE ENTRANCE. IF PIPING IS IMPRACTICAL, A BERM WITH 5:1 SLOPES THAT CAN BE CROSSED BY VEHICLES MAY BE SUBSTITUTED FOR THE PIPE.
7. THE ENTRANCE SHALL BE MAINTAINED IN A CONDITION THAT WILL PREVENT TRACKING OR FLOWING OF SEDIMENT ONTO PUBLIC RIGHTS-OF-WAY. THIS MAY REQUIRE PERIODIC TOP DRESSING WITH ADDITIONAL STONE AS CONDITIONS DEMAND AND REPAIR AND/OR CLEAN OUT OF ANY MEASURES USED TO TRAP SEDIMENT. ALL SEDIMENT SPILLED, WASHED, OR TRACKED ONTO PUBLIC RIGHT-OF-WAY MUST BE REMOVED PROMPTLY.

STABILIZED CONSTRUCTION ENTRANCE

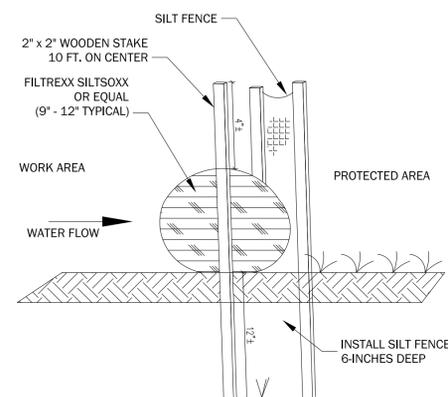

NOTES:

1. ALL MATERIALS TO MEET INSTALLER SPECIFICATIONS.
2. COMPOST/SOIL/ROCK/SEED FILL TO MEET APPLICATION REQUIREMENTS.
3. LARGER SILT SOXX OR EQUAL TO BE PROVIDED FOR STEEP SLOPES AND HEAVY FLOW AREAS.
4. SILT SOXX OR EQUAL TO BE REMOVED, COMPOSTED, OR DISPERSED AS PER CONSERVATION COMMISSION DIRECTION.
5. SILT FENCE TO BE INSPECTED DAILY AND REPAIRED AS NECESSARY.
6. SEDIMENT TO BE REMOVED WHEN ACCUMULATED LEVEL REACHS 1/3 THE HEIGHT OF THE BMP, OR 6 INCHES, WHICHEVER IS LESS.

SILT FENCE (W/STRAW
WATTLE AS NECESSARY)
NOT TO SCALE

Title:

EROSION CONTROL DETAILS

Prepared by:

BEALS • ASSOCIATES INC.

2 THIRTEENTH STREET

CHARLESTOWN, MASSACHUSETTS 02114

617 742-3554

617 742-0310

DATE:

August 21, 2015

SCALE:

AS SHOWN

DESIGNED BY: TRG

CHECKED BY: TPM

DRAWN BY: TRG

REVISIONS:

REVISIONS:	DATE:

PROJECT NUMBER:
C-407.20

SHEET NUMBER:
2-2